

# Sound Reduction Index according to DIN EN ISO 10140-2

P-BA 110/2013e

**Client:** Espero BV  
NL – 5145 PE Waalwijk

**Fig. 3**

## Test Specimen:

Double-leaf movable partition wall (test object S 10534-22), Type: Sonico 110-54, covering made of 18 mm plastic-coated chipboards, bitumen loading mats (mass per unit area: 12 kg/m<sup>2</sup>) clamped to the interior on both sides, with 70 mm thick mineral wool in the element cavity.


The partition was in a functional state.

Partition thickness: 115 mm  
Weight of solid wall element: 185 kg  
Mass per unit area of test wall: 57.5 kg/m<sup>2</sup> (including frame and mechanics).

Additional description and technical data see page 2 and 3 of test report P-BA 110/2013e as well as Fig.1 and 2.

**Test surface area:** 10.7 m<sup>2</sup>  
**Test facilities:** test facilities for walls P6  
**Room volume:** V<sub>S</sub> = 52.8 m<sup>3</sup>  
V<sub>E</sub> = 63.2 m<sup>3</sup>  
**Maximum insulation of test facility:** R'<sub>max,w</sub> = 77 dB  
**Relative humidity:** 40 %  
**Air temperature:** 21 °C  
**Static air pressure:** 982 hPa  
**Excitation noise:** pink noise  
**Test date:** November 6, 2012

Frequency f [Hz]	Sound reduction index R [dB]
100	37.2
125	39.3
160	40.2
200	43.9
250	44.6
315	46.1
400	48.7
500	51.2
630	51.4
800	52.5
1000	54.3
1250	55.7
1600	57.6
2000	58.9
2500	60.3
3150	59.2
4000	59.9
5000	61.4

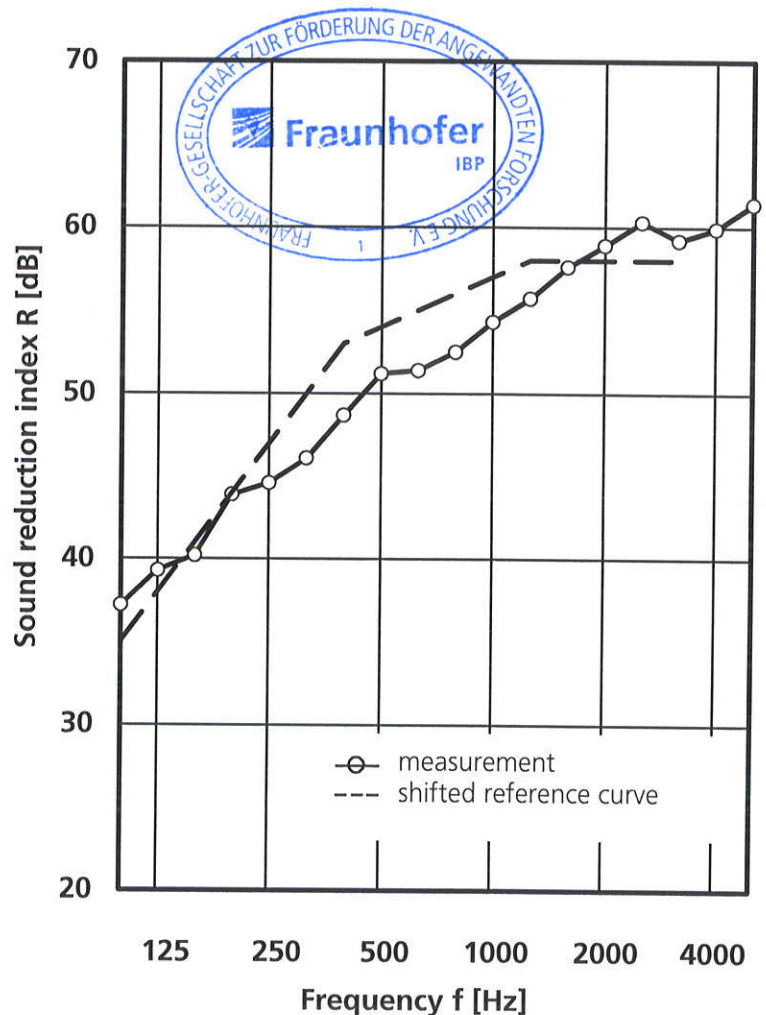

**Weighted sound reduction index and spectrum adaptation terms according to DIN EN ISO 717-1: 2006**

$$R_w (C; C_{tr}; C_{100-5000}; C_{tr,100-5000}) = 54 \text{ dB } (-1; -5; 0; -5)$$



The test was carried out in a test laboratory of the IBP accredited according to DIN EN ISO/IEC 17025 by the DAP (German Accreditation System for Testing), No. DAP-PL-3743.26.

Stuttgart, July 23, 2013  
**Head of the test laboratory:**